

McKISSICK**OVERHAUL BALLS****COMPLETE WITH STANDARD CLEVIS****C-54015
(15 Ton)**

Rated Size	Ball Weight Pounds Each	Plain Bearing Number	Roller Thrust Bearing Number
3 Ton	75	C-50703	C-50703-R
3 Ton	200	C-52003	C-52003-R
5 Ton	125	C-51205	C-51205-R
5 Ton	250	C-52505	C-52505-R
7½ Ton	200	C-52007	C-52007-R
10 Ton	200	C-52010	C-52010-R
10 Ton	400	C-54010	C-54010-R
15 Ton	400	C-54015	C-54015-R
15 Ton	450	C-54515	C-54515-R

**COMPLETE WITH WEDGE & SOCKET****W-51205
(5 Ton)**

- In ordering, please specify wire rope size desired. If no size is indicated, balls will be shipped with the larger size of listed fitting.



Rated Size	Ball Weight Pounds Each	Wire Rope Size Inches	Plain Bearing Number	Roller Thrust Bearing Number
3 Ton	75	½ or ⅝	W-50703	W-50703-R
3 Ton	200	½ or ⅝	W-52003	W-52003-R
5 Ton	125	⅝ or ¾	W-51205	W-51205-R
5 Ton	250	⅝ or ¾	W-52505	W-52505-R
7½ Ton	200	¾ or ⅞	W-52007	W-52007-R
10 Ton	200	⅞ or 1	W-52010	W-52010-R
10 Ton	400	⅞ or 1	W-54010	W-54010-R
15 Ton	400	⅞ or 1	W-54015	W-54015-R
15 Ton	450	1 or 1⅛	W-54515	W-54515-R



- TOP SWIVEL assures that as line spins ball remains stationary.
- Complete range of weights and capacities — short overall lengths.
- SEALED plain or roller thrust bearings, Alemite lubricated.
- Designed to fit Standard Clevis and Open Wedge Socket.
- HOOK HAS FREE MOVEMENT IN ALL PLANES — Forged steel eye hook with integral cam for safety latch installation at any time, or may be ordered complete with safety latch.

**TOP SWIVELING OVERHAUL BALLS,
WITH NO UPPER CONNECTION**

Rated Size	Ball Weight Pounds (Each)	For Standard Fitting (Size)	Plain Bearing Number	Roller Thrust Bearing Number
3 Ton	75	5/8"	60703	60703-R
5 Ton	50	3/4"	60505	60505-R
5 Ton	125	3/4"	61205	61205-R
5 Ton	250	3/4"	62505	62505-R
7½ Ton	200	7/8"	62007	62007-R
10 Ton	100	3/4"	61010	61010-R
10 Ton	200	1"	62010	62010-R
10 Ton	400	1"	64010	64010-R
15 Ton	450	1"-1 1/8"	64515	64515-R
15 Ton	650	1"-1 1/8"	66515	66515-R

McKISSICK**TOP SWIVELING OVERHAUL BALLS****TOP SWIVELING**

Overhaul Balls Complete with Wedge and Socket

Rated Size	Bolt Weight Pounds (Each)	For Standard Fitting (Size)	Plain Bearing Number	Roller Thrust Bearing Number
3 Ton	75	5/8"	W60703	W60703-R
5 Ton	50	3/4"	W60505	W60505-R
5 Ton	125	3/4"	W61205	W61205-R
5 Ton	250	3/4"	W62505	W62505-R
7½ Ton	200	7/8"	W62007	W62007-R
10 Ton	100	3/4"	W61010	W61010-R
10 Ton	200	1"	W62010	W62010-R
10 Ton	400	1"	W64010	W64010-R
15 Ton	450	1"-1 1/8"	W64515	W64515-R
15 Ton	650	1"-1 1/8"	W66515	W66515-R


**W-64515
(15 TON)****64010
(10 TON)****TOP SWIVELING**

Overhaul Balls, with Standard Clevis

Rated Size	Bolt Weight Pounds (Each)	For Standard Fitting (Size)	Plain Bearing Number	Roller Thrust Bearing Number
3 Ton	75	5/8"	C60703	C60703-R
5 Ton	125	3/4"	C61205	C61205-R
5 Ton	250	3/4"	C62505	C62505-R
7½ Ton	200	7/8"	C62007	C62007-R
10 Ton	200	1"	C62010	C62010-R
10 Ton	400	1"	C64010	C64010-R
15 Ton	450	1"-1 1/8"	C64515	C64515-R
15 Ton	650	1"-1 1/8"	C66515	C66515-R

McKISSICK

CUSTOM DESIGNED

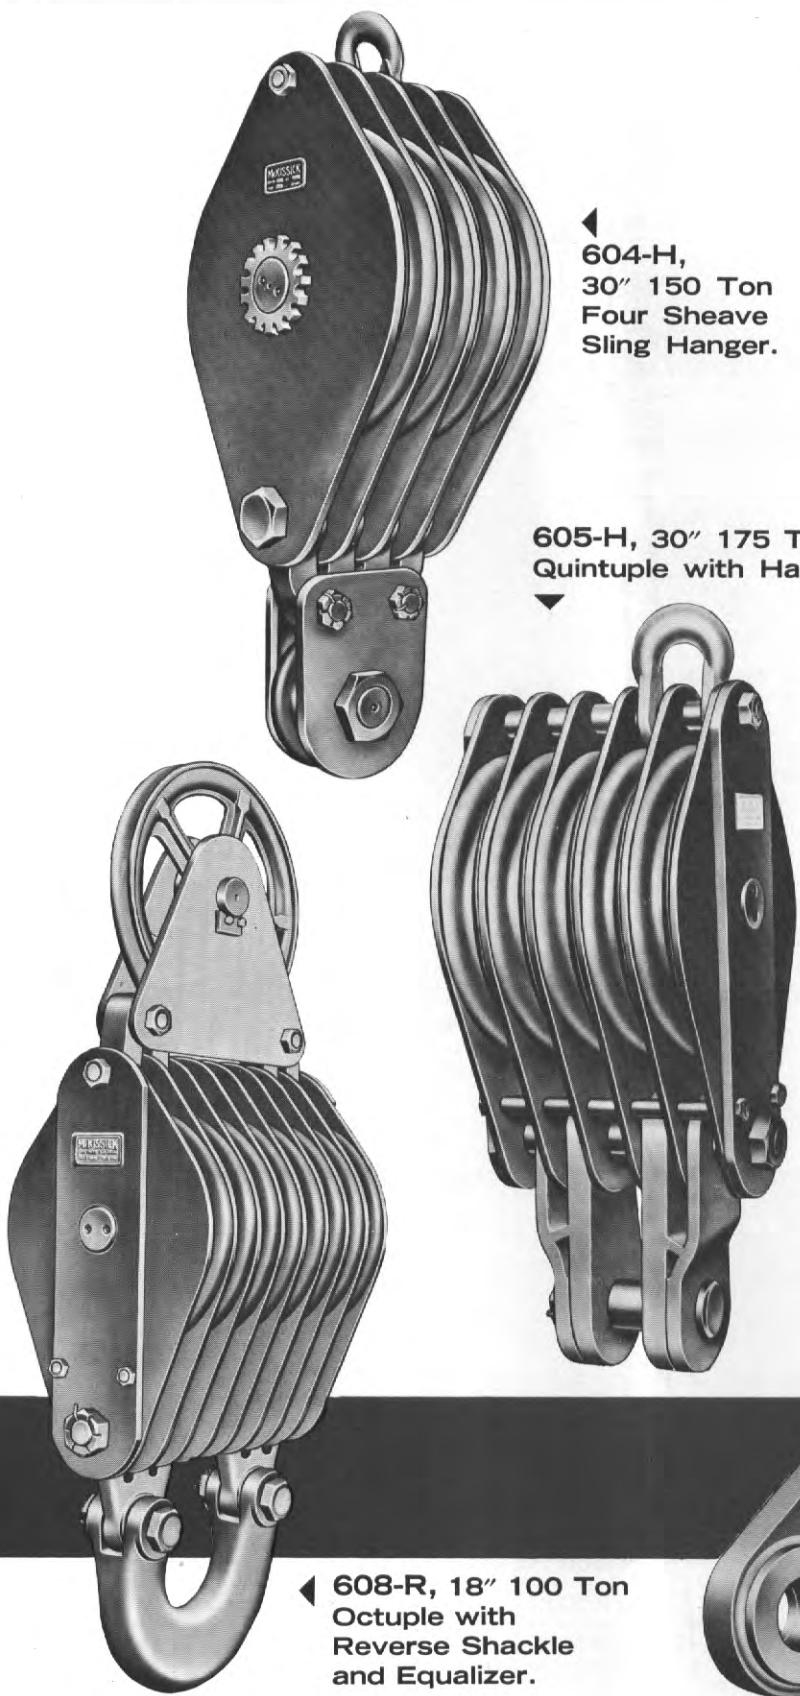

6010-R, 24" 200 Ton
Ten Sheave with special Hanger.

608-S, 30" 250 Ton

Eight Sheave with special Hanger.

608-S, 30" 250 Ton

Eight Sheave with special Hanger.

FOR ALL SPECIAL APPLICATIONS CONTACT **McKISSICK PRODUCTS COMPANY AT**
DRAWER 768, TULSA, OKLAHOMA 74101