

CROSBY


Load Rated®

SNATCH
AND
TOGGLE

BLOCKS



C-700

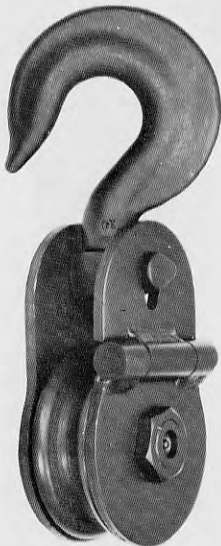

C-720

C-720



CROSBY SNATCH BLOCKS

Easy to use snatch blocks with hinged side strap—unique locking device permits disengagement by simply folding hook. Formed steel side plates with capacity stamped permanently in place—eliminates accidental overloading. Capacities to 5 tons.

Block Number	Safe Working Load Tons	Sheave Size Inches	Wire Rope Size Inches	Weight Pounds Each
10611	2	6	3⁄8 or 1⁄2	14
10811	3	8	1⁄2 or 5⁄8	24
11011	4	10	1⁄2 or 5⁄8	40
11211	5	12	5⁄8 or 3⁄4	60

Blocks are equipped with ductile iron sheaves with oil impregnated bronze bushings.

CROSBY HEAVY DUTY UTILITY SNATCH BLOCK

Forged steel sheaves, bronze bearings with pressure lubrication, drop forged steel hook, all combine to provide a real heavy duty block. Self-locking hinged plate cannot open accidentally. Universal sheave grooving takes up through 7⁄8" rope.

Block Number	Safe Working Load Tons	Sheave Size Inches	Fitting	Wire Rope Size Inches	Weight Pounds Each
60611	10	6	Swivel Hook	up to 7⁄8	33
60614	10	6	Swivel Shackle	up to 7⁄8	34
60811	10	8	Swivel Hook	up to 7⁄8	45
60814	10	8	Swivel Shackle	up to 7⁄8	46
61011	10	10	Swivel Hook	up to 7⁄8	52
61014	10	10	Swivel Shackle	up to 7⁄8	53

TOGGLE BLOCK

Sometimes called TAIL BOARD BLOCK. Same outstanding feature as utility snatch block except without hooks and with stiff side plates.

Block Number	Safe Working Load Tons	Sheave Size Inches	Fitting	Wire Rope Size Inches	Weight Pounds Each
70610	10	6	Toggle Pin	up to 7⁄8	22
70810	10	8	Toggle Pin	up to 7⁄8	29

LEBUS

Load Rated®

SNATCH BLOCKS

HEAVY DUTY SNATCH BLOCK

FORGED—HEAT TREATED—FOR GREATEST POSSIBLE STRENGTH

Simple turn of lock pin opens the Lebus Heavy Duty Snatch Block in seconds. Designed for fast, efficient line changes and maximum safety. All parts forged, heat treated and machined. Sheave pin locked into side plate—equal distribution of load to each side plate. Beaded side plate prevents rope from jamming. Choice of roller bearing or bronze bushed sheaves.



L-160

LEBUS HEAVY DUTY SNATCH BLOCK

SPECIFICATIONS

Block Number	Block Size Inches	Attachment	Sheave Diameter Inches	Center Pin Diameter Inches	Lock Pin Inches	Wire Rope Size Inches	Weight Pounds Each	Working Load Tons	Ultimate Hook Capacity Pounds
L-5-H	5	Hook	5	1 1⁄4	1	3⁄8-1⁄2	15.3	8	35000
L-5-S	5	Shackle	5	1 1⁄4	1	3⁄8-1⁄2	15	8	
L-5-T	5	Pin Only—(Tailboard)	5	1 1⁄4	1	3⁄8-1⁄2	10	8	
L-6-H	6	Hook	5 7⁄8	1 3⁄4	1 1⁄4	5⁄8-3⁄4	31.8	15	72000
L-6-S	6	Shackle	5 7⁄8	1 3⁄4	1 1⁄4	5⁄8-3⁄4	30	15	
L-6-T	6	Pin Only—(Tailboard)	5 7⁄8	1 3⁄4	1 1⁄4	5⁄8-3⁄4	17.8	15	
L-65-H	6 1⁄2	Hook	6	2	1 1⁄4	3⁄4-7⁄8	50	25	117000
L-65-S	6 1⁄2	Shackle	6	2	1 1⁄4	3⁄4-7⁄8	54	25	
L-65-T	6 1⁄2	Pin Only—(Tailboard)	6	2	1 1⁄4	3⁄4-7⁄8	31	25	
L-85-H	8 1⁄2	Hook	8	2	1 1⁄4	7⁄8-1	62	25	117000
L-85-S	8 1⁄2	Shackle	8	2	1 1⁄4	7⁄8-1	66	25	
L-85-T	8 1⁄2	Pin Only—(Tailboard)	8	2	1 1⁄4	7⁄8-1	43	25	
L-105-H	10 1⁄2	Hook	9 7⁄8	2	1 1⁄2	1-1 1⁄8	73	25	117000
L-105-S	10 1⁄2	Shackle	9 7⁄8	2	1 1⁄2	1-1 1⁄8	77	25	
L-105-T	10 1⁄2	Pin Only—(Tailboard)	9 7⁄8	2	1 1⁄2	1-1 1⁄8	54	25	

GENERAL PURPOSE SNATCH BLOCK

FORGED—HEAT TREATED

Opened and closed in seconds without the use of tools. Ideal for use in heavy rigging; high or difficult places. Forged heat treated, precision machined for exact fit and uniform wear. Available with hook or shackle. Choice of self-lubricating bronze bushing or roller bearing. Either wire or manila rope may be used.




L-170

GENERAL PURPOSE SNATCH BLOCK


SPECIFICATIONS

Block Number	Block Size Inches	Attachment	Sheave Diameter Inches	Center Pin Diameter Inches	Lock Pin Diameter Inches	Wire Rope Size Inches	Manila Rope Size Inches	Weight Pounds Each	Working Load Tons	Ultimate Hook Capacity Pounds
L-45-H	4 1⁄2	Hook	4 1⁄8	1	7⁄8	1⁄4-1⁄2	3⁄8-1 1⁄4	13.3	6	35000
L-45-S	4 1⁄2	Shackle	4 1⁄8	1	7⁄8	1⁄4-1⁄2	3⁄8-1 1⁄4	13.8	6	
L-45-T	4 1⁄2	Pin Only—(Tailboard)	4 1⁄8	1	7⁄8	1⁄4-1⁄2	3⁄8-1 1⁄4	8.5	6	

SUPER CHAMPION SNATCH BLOCKS

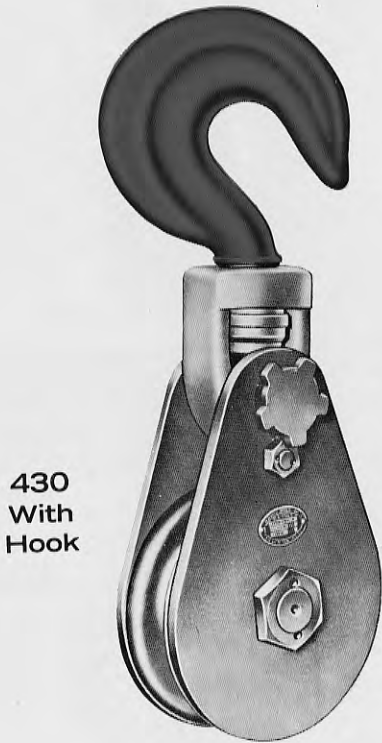

430
With
Hook

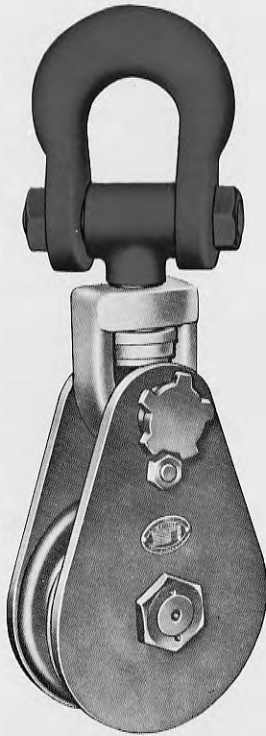

431
With
Shackle

407 Toggle Block
(Tail Board)



- Drop Forged, heat treated swivel hook, or swivel shackle. Hooks and shackles quickly interchangeable.
- 8"-10"-12"-14"-17"-18"-20"-24" Steel sheaves, grooved to proper wire rope size, 2 1/4" to 4" diameter center pin, 1 1/2" diameter hook bolt.
- High speed bronze bushings, or roller bearings, Alemite lubrication.
- For Super duty service, involving working loads of up to 60 tons.

SPECIFICATIONS

NOTE: In ordering, please specify: Size, Block No., Hook or Shackle, Bronze Bushed or Roller Bearing, and proper wire rope line size. (Unless otherwise specified, blocks will be furnished for rope as indicated below.)

Sheave Size Inches	Center Pin Diameter Inches	Wire Rope Size Inches	Weight, Pounds, Each			Safe Working Load Tons	Ultimate Hook Capacity Pounds
			430	431	407		
8	2 1/4	1-1 1/8	75	87	42	40	135,000
10	2 1/4	1-1 1/8	89	101	55	40	135,000
12	2 1/4	1-1 1/8	103	115	70	40	135,000
14	2 1/4	1-1 1/8	123	135	90	40	135,000
17	3 1/2	1-1 1/8	180	195		40	165,000
18	4	1-1 1/8	240	260		40	165,000
20	4	1 1/4	375	400		60	225,000
24	4	1 1/4	450	475		60	225,000



All Snatch Blocks available
with safety latch.

DOUBLE SHEAVE SNATCH BLOCKS

432
Super Champion
With Hook



433
Super Champion
With Shackle



SUPER CHAMPION

- Incorporates the features of the McKissick Super Champion Snatch Block in a double sheave block.
- Swivel Hook or Swivel Shackle, for working loads of up to 40 tons.

NOTE: In ordering, please specify: Size, Block No., Hook or Shackle, Bronze Bushed or Roller Bearing, and proper line size. (Unless otherwise specified, blocks will be furnished for wire rope, as indicated below.)

Sheave Size Inches	Center Pin Diameter Inches	Wire Rope Size Inches	Weight Pounds Each	Safe Working Load Tons	Ultimate Hook Capacity Pounds
8	2 1/4	1	105	40	135,000
10	2 1/4	1	122	40	135,000
12	2 1/4	1	140	40	135,000
14	2 1/4	1	190	40	135,000

LIGHT TYPE CHAMPION

- Light Type Champion Snatch Block as a double sheave block.
- Drop Forged Swivel Hook or Swivel Shackle, 1 1/2" center pin, high speed bronze bushings, or roller bearings, Alemite lubrication.
- Patented opening feature permits easy insertion of wire rope in both sheaves with removal of one bolt.



NOTE: In ordering please specify: Size, Block No., Hook or Shackle, Bronze Bushed or Roller Bearing, and proper wire rope size. (Unless otherwise specified, blocks will be furnished for wire rope, as indicated below.)




408
Double
With
Hook

409
Double
With
Shackle

Sheave Size Inches	Center Pin Diameter Inches	Wire Rope Size Inches	Weight Pounds Each	Safe Working Load Tons	Ultimate Hook Capacity Pounds
4 1/2	1	3/8-1/2	16	5	26,000
6	1 1/2	3/4	46	23	92,000
8	1 1/2	3/4	54	23	92,000
10	1 1/2	3/4	62	23	92,000
12	1 1/2	3/4	69	23	92,000
14	1 1/2	3/4	77	23	92,000

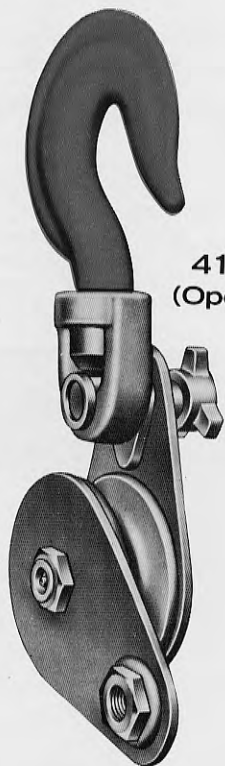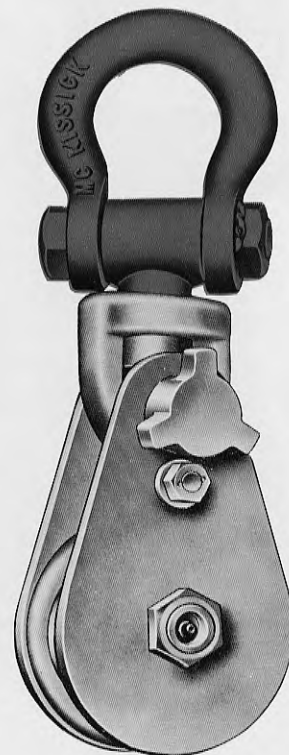418
With Hook418
(Open)419
With Shackle404 Toggle Block
(Tail Board)

- Forged, steel swivel hooks, yokes, sheaves and shackles. Hooks and shackles quickly interchangeable.
- Steel sheaves, 3"-4½"-6"-8"-10"-12"-14"-16"-18" diameter, grooved to proper line size, 1½" diameter center pin, 1" diameter hook pin, high speed bronze bushings or roller bearings, Alemite lubrication.
- Patented opening feature permits insertion of line while block is suspended from gin-pole, without effort.
- For general duty, involving working loads of up to 25 Tons.

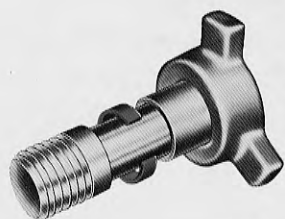

NEW bolt retaining spring assures no lost bolts.


Safety Latch available for all McKissick Snatch Blocks.



SPECIFICATIONS

Sheave Size Inches	Center Pin Diameter Inches	Wire Rope Size Inches	Manila Rope Size Inches	Weight, Pounds, Each			Safe Working Load Tons	Ultimate Hook Capacity Pounds
				418	419	404		
3	¾	5/16-¾		4	4	3	3	16,000
4½	1	¾-1½	1	11	12	6	5	26,000
6	1½	5/8-¾	1½	26	27	15	15	57,000
8	1½	5/8-¾	1½	33	34	21	15	57,000
10	1½	5/8-¾	1½	41	42	29	15	57,000
12	1½	5/8-¾	1½	48	49	36	15	57,000
14	1½	5/8-¾		55	56		15	57,000
16	2½	¾-7/8		130	135		23	92,000
18	2¾	7/8-1		150	155		25	96,000

NOTE: In ordering, please specify: Size, Block No., Hook or Shackle, Bronze Bushed or Roller Bearing, and proper rope size. (Unless otherwise specified, blocks will be furnished for wire rope, as indicated above.)

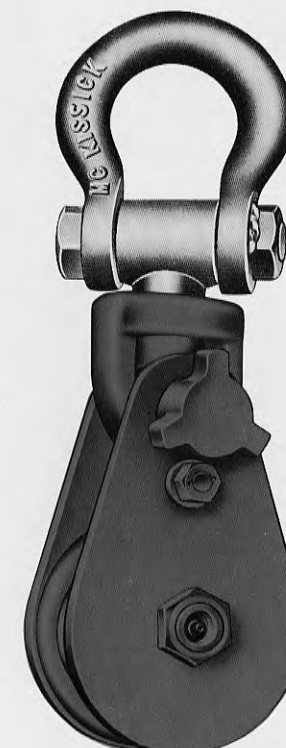416
All Alloy
With Hook416
All Alloy
Open417
All Alloy
With Shackle

- Entire Block made from high tensile alloy steel; Hooks, Yokes, Sheaves, and Pins, S.A.E. 4140 Heat Treated Steel; Super Bronze Bushings. Use of high tensile alloy gives block **only 60% of the weight** of blocks of comparable capacities.
- Patented easy opening feature of "Champion" blocks retained.
- For heavy duty service, involving working loads of up to 23 Tons.


SPECIFICATIONS

Sheave Size Inches	Center Pin Diameter Inches	Wire Rope Size Inches	Weight Pounds Each	Safe Working Load Tons	Ultimate Hook Capacity Pounds
6	1½	¾	27	23	97,000
8	1½	¾	33	23	97,000
10	1½	¾	41	23	97,000

NOTE: In ordering, please specify: Size, Block No., Hook or Shackle, Bronze Bushed or Roller Bearing, and proper rope size. (Unless otherwise specified, blocks will be furnished for wire rope, as indicated above.)



420
With Hook

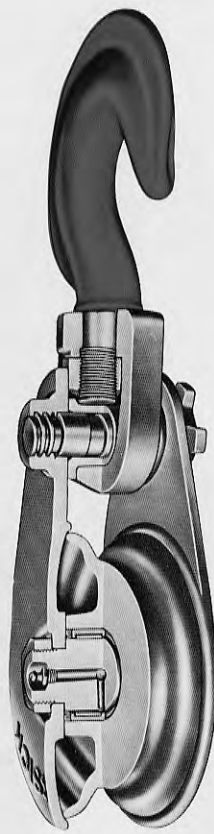

420
Cutaway




421
With Shackle



406 Toggle Block
(Tail Board)



Safety latch available for
all McKissick Snatch Blocks.

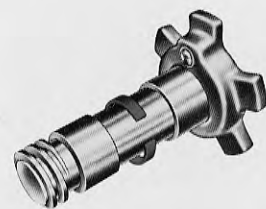

NEW bolt retaining spring
assures no lost bolts.

- Hooks, Shackles, Yokes, Sheaves and Shells are FORGED, heat treated, selected steels. Shells are well rounded, and bead encircles sheave, eliminating any possibility of rope jamming.
- 6"-8"-10"-14" diameter steel sheaves, grooved to proper wire rope size, 2" diameter center pin, 1 1/4" diameter hook pin.
- High speed bronze bushings, or sealed roller bearings, Alemite lubrication.
- Patented opening feature permits insertion of line while block is suspended from gin-pole, without effort.
- For heavy duty service, involving working loads of up to 25 Tons.


SPECIFICATIONS

Sheave Size Inches	Center Pin Diameter Inches	Wire Rope Size Inches	Manila Rope Size Inches	Weight, Pounds, Each			Safe Working Load Tons	Ultimate Hook Capacity Pounds
				420	421	406		
6	2	5/8-3/4	1 1/2	40	48	24	23	92,000
8	2	5/8-3/4	1 1/2	51	57	30	25	96,000
10	2	3/4-7/8	1 1/2	63	69	42	25	96,000
14	2 1/2	7/8-1		84	90		25	96,000


NOTE: In ordering, please specify: Size, Block No., Hook or Shackle, Bronze Bushed or Roller Bearing, and proper rope size. (Unless otherwise specified, blocks will be furnished for wire rope, as indicated above.)



6" 410
With Hook

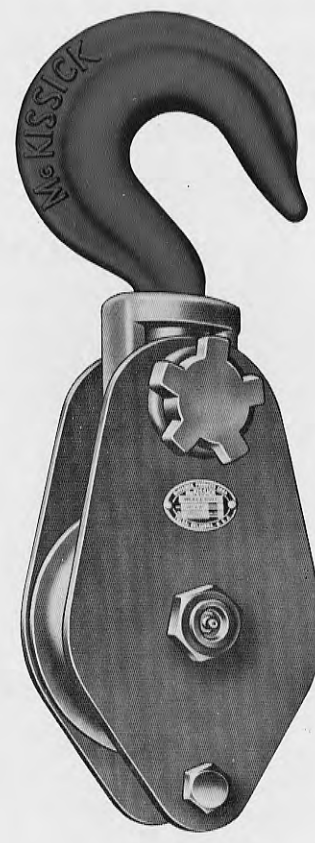

8" 410
With Hook

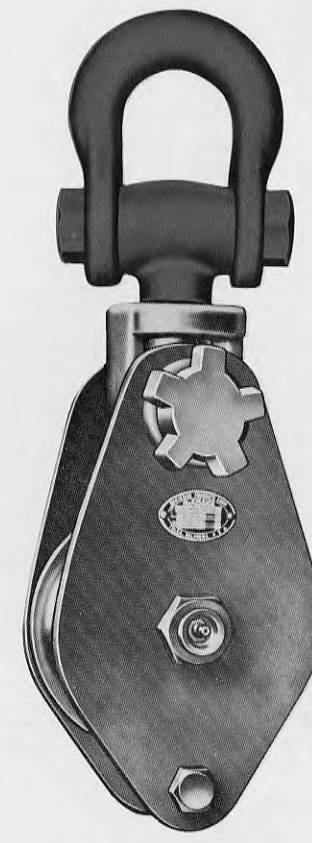

8" 411
With Shackle



405 Toggle Block
(Tail Board)



Safety latch available for
all McKissick Snatch Blocks.

- All Steel construction, steel sheaves, 6"-8"-10"-12" diameter, grooved for any size wire rope, or 1 1/2" manila rope.
- Forged steel swivel hooks, yokes, and shackles. Hooks and shackles quickly interchangeable.
- 2" diameter center pin, Alemite lubrication, high speed bronze bushings, or roller bearings.
- Side plates bolted at three points, minimizing any tendency to spread.
- Heavy duty Snatch Blocks are available as double sheave blocks, prices on request.


SPECIFICATIONS

Sheave Size Inches	Center Pin Diameter Inches	Wire Rope Size Inches	Manila Rope Size Inches	Weight, Pounds, Each			Safe Working Load Tons	Ultimate Hook Capacity Pounds
				410	411	405		
6	2	5/8-3/4	1 1/2	41	49	25	23	92,000
8	2	5/8-3/4	1 1/2	53	59	32	25	96,000
10	2	3/4-7/8	1 1/2	59	65	41	25	96,000
12	2	3/4-7/8	1 1/2	65	71	47	25	96,000

NOTE: In ordering, please specify: Size, Block No., Hook or Shackle, Bronze Bushing or Roller Bearings, and proper rope size. (Unless otherwise specified, blocks will be furnished for wire rope, as indicated above.)

SELF LOCKING SNATCH BLOCKS

LIGHT DUTY

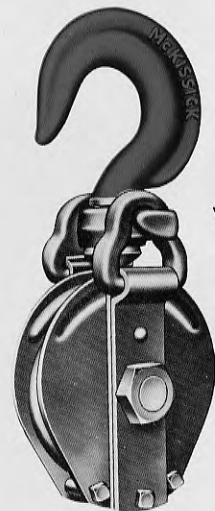

439
WITH HOOK

- Forged hooks, heads, sheaves and links.
- Steel sheaves, grooved to proper wire rope size.
- Steel shells, with pressed-in recess around sheave to prevent rope jamming.
- Generous size center pin, self-lubricating bronze bearings.
- Available as: No. 439 With Hook, No. 439A With Shackle, and No. 439B With Swivel Eye.

SPECIFICATIONS

Sheave Size Inches	Center Pin Diameter Inches	Wire Rope Size Inches	Weight Pounds Each	Safe Working Load Tons	Ultimate Hook Capacity Pounds
6	1 1/4	3/8-1/2	22	7	36,000

HEAVY DUTY

- Forged heat treated hooks, heads, and links.
- Steel sheaves, grooved to proper wire rope size.
- Steel shells, made from heavy plate, with pressed-in recess around sheave, to prevent rope jamming.
- Large bearing diameter, High Speed bronze bushings, Alemite lubrication. Shouldered center pin prevents plates from cramping or spreading under load.
- Available as: No. 440 With Hook, and No. 440A With Shackle.

NOTE: In ordering, please specify: Block No., Hook or Shackle, proper rope size. (Unless otherwise specified, blocks will be furnished for wire rope, as indicated below.)

SPECIFICATIONS

Sheave Size Inches	Center Pin Diameter Inches	Wire Rope Size Inches	Weight Pounds Each	Safe Working Load Tons	Ultimate Hook Capacity Pounds
6	1 5/8	5/8-3/4	35	20	92,000




440
WITH HOOK

STEEL SHELL MANILA ROPE

- Forged hooks, heads, and links.
- Cast iron sheaves, self-lubricating bronze bushings.
- Shells pressed with rounded edges, to prevent chaffing of the rope.
- Handy drop link design permits easy insertion of rope.


SPECIFICATIONS

Sheave Size Inches	Center Pin Diameter Inches	Rope Size Inches	Weight Pounds Each	Safe Working Load Tons	Ultimate Hook Capacity Pounds
3	1/2	3/8 Wire—3/4 Manila	5	2 1/2	12,500
4 1/2	5/8	1/2 Wire—1 Manila	11	4	26,000

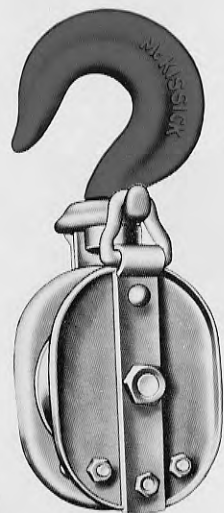



441
WITH HOOK

PEERLESS SNATCH BLOCKS

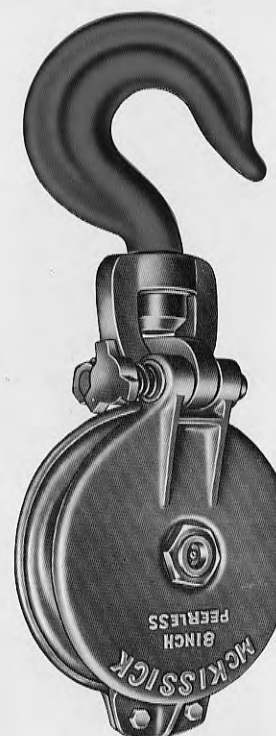


With Hook
PB-1 (bronze bushed)
PR-1 (roller bearing)

With Swivel Shackle
PB-2 (bronze bushed)
PR-2 (roller bearing)

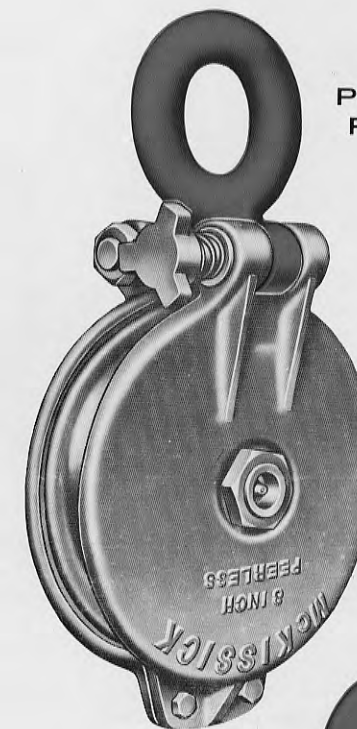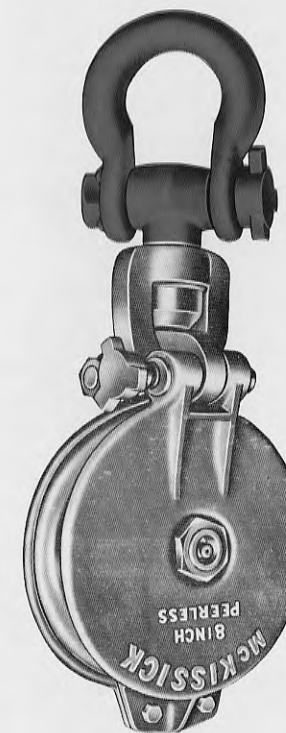

With Solid Eye
PB-3 (bronze bushed)
PR-3 (roller bearing)

With Plain Clevis
PB-4 (bronze bushed)
PR-4 (roller bearing)

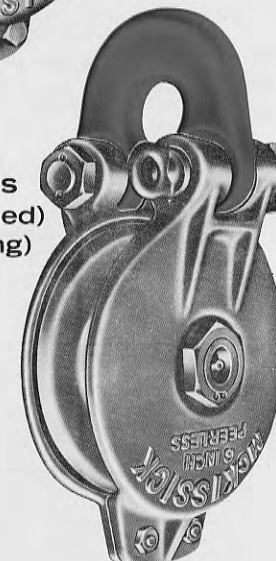

- Forged Hooks, Steel Sheaves, 6"-8"-10"-12" diameter, grooved to proper line size.
- 1 1/2" diameter center pin, high speed bronze bushings, or roller bearings, Alemite lubrication.
- Shells well rounded, bead encircles sheave preventing rope jamming, hook swings as well as swivels.
- An economical block, with large range of sheave sizes and capacities.


Safety latch available
for all McKissick Snatch Blocks

SPECIFICATIONS


Sheave Size Inches	Center Pin Diameter Inches	Wire Rope Size Inches	Weight Pounds Each	Safe Working Load Tons	Ultimate Hook Capacity Pounds
6	1 1/2	5/8	27	7	26,000
8	1 1/2	5/8-3/4	35	12	57,000
10	1 1/2	5/8-3/4	55	18	76,000
12	1 1/2	5/8-3/4	65	20	92,000

NOTE: In ordering, please specify: Size, Block No., Hook or Shackle, and proper rope size. (Unless otherwise specified, blocks will be furnished for wire rope, sizes as indicated above.)


WITH CLEVISES OR
WITH SWIVEL HOOKS

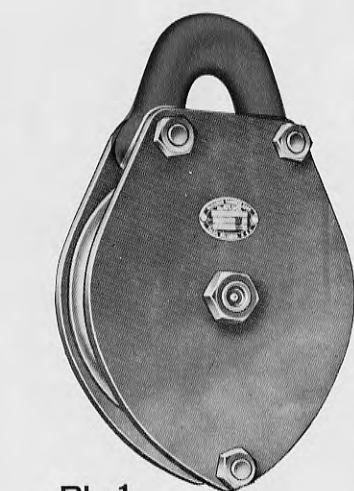

PL-1
Single
With Clevis

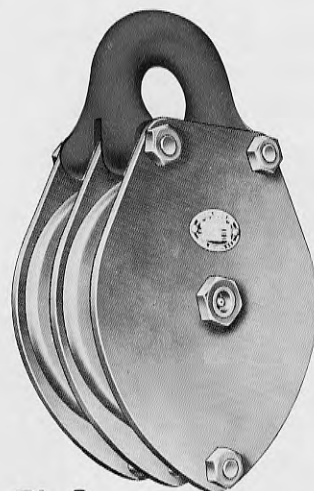

PL-2
Double
With Clevis

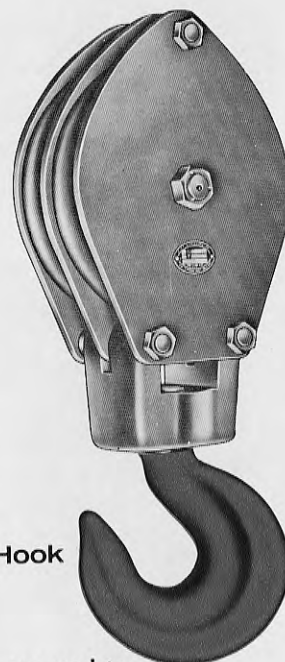

PH-2
Double
With Swivel Hook

- All steel construction, heavy clevises, steel sheaves, 8"-10"-12" diameter, grooved to proper line wire rope size.
- Large diameter center pins, high speed bronze bushings, or roller bearings, Alemite lubrication.
- Designed primarily for the service encountered on pipe line booms.

NOTE: In ordering, please specify: Size, Block No., Hook or Shackle, Bronze Bushed or Roller Bearing, and proper rope size. (Unless otherwise specified, blocks will be furnished for wire rope, as indicated below.)

SPECIFICATIONS

PIPE LINE BLOCKS WITH CLEVISES

Sheave Size Inches	Center Pin Diameter Inches	Wire Rope Size Inches	PL-1 (Single) with Clevis		PL-2 (Double) with Clevis	
			Weight Pounds Each	Safe Working Load, Tons	Weight Pounds Each	Safe Working Load, Tons
8	1½	5/8-¾	35	12	52	16
10	1½	5/8-¾	42	12	65	16
12	1½	5/8-¾	48	12	80	24

PIPE LINE BLOCKS WITH SWIVEL HOOKS

Sheave Size Inches	Center Pin Diameter Inches	Wire Rope Size Inches	PH-1 (Single) with Swivel Hook		PH-2 (Double) with Swivel Hook	
			Weight Pounds Each	Safe Working Load, Tons	Weight Pounds Each	Safe Working Load, Tons
8	1½	5/8-¾	40	12	60	16
10	1½	5/8-¾	51	12	75	16
12	1½	5/8-¾	58	12	95	24

WITH CLEVISES OR
WITH SWIVEL HOOKS




HPL-1



HPH-1



HPL-2

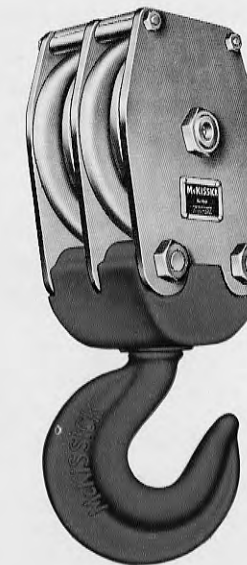

HPH-2

- Extra heavy clevises, with large openings, 10", 12", 14" diameter steel sheaves grooved to proper wire rope size.
- For extra heavy service on pipe line booms. Extra large center pins with high speed bronze bushings or roller bearings, Alemite lubrication.

NOTE: In ordering, please specify: Size, Block No., Hook or Shackle, Bronze Bushed or Roller Bearing, and proper rope size. (Unless otherwise specified, blocks will be furnished for wire rope, as indicated below.)

SPECIFICATIONS

HEAVY DUTY PIPE LINE BLOCKS WITH CLEVISES

Sheave Size Inches	Center Pin Diameter Inches	Wire Rope Size Inches	HPL-1 (Single) with Clevis		HPL-2 (Double) with Clevis	
			Weight Pounds Each	Safe Working Load, Tons	Weight Pounds Each	Safe Working Load, Tons
10	2	7/8-1	65	20	100	30
12	2	7/8-1	75	20	120	30
14	2	7/8-1	86	20	138	30


HEAVY DUTY PIPE LINE BLOCKS WITH SWIVEL HOOKS

Sheave Size Inches	Center Pin Diameter Inches	Wire Rope Size Inches	HPH-1 (Single) with Hook		HPH-2 (Double) with Hook	
			Weight Pounds Each	Safe Working Load, Tons	Weight Pounds Each	Safe Working Load, Tons
10	2	7/8-1	75	20	130	30
12	2	7/8-1	85	20	150	30
14	2	7/8-1	96	20	162	30

- Available as triple sheave block, price on application.

- All Steel Construction, Cast Steel Sheaves, grooved for maximum of 1½" wire rope.
- Shells well rounded, with bead encircling sheave, preventing rope jamming.
- 2" diameter center pin, high speed bronze bushings, or Hy-Load roller bearings, Alemite lubrication.
- Shouldered pin prevents shell from pinching or spreading under load.

Sheave Size Inches	Center Pin Diameter Inches	Wire Rope Diameter Inches	Weight Pounds Each	Safe Working Load, Tons
8	2	1¾-1½	41	15
10	2	1¾-1½	58	18
12	2	1¾-1½	75	20
14	2½	1¾-1½	119	25

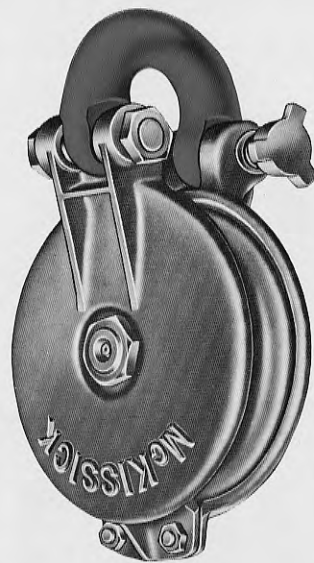

LL-1


HAY FORK PULLEY

HF-1
With HookHF-2
With Eye

- One Piece Pressed Steel Shells, edges well rounded to prevent chaffing of rope.
- Forged steel eyes and hooks.
- 1" diameter center pin, full roller bearings, and Alemite lubrication.

Sheave Size Inches	Connection	Block Number	Rope Size Inches	Weight Pounds Each	Safe Working Load, Tons
4¼	Swivel Hook	HF-1	1¼ Manila	6	1
4¼	Swivel Eye	HF-2	1¼ Manila	6	1
4¼	Swivel Hook	HF-3	¾-½ Wire	6	1
4¼	Swivel Eye	HF-4	¾-½ Wire	6	1
8	Swivel Eye	HF-5	¾-½ Wire	11	2
6	Swivel Hook	HF-11	1½ Manila	11	3
6	Swivel Eye	HF-12	1½ Manila	11	3
6	Swivel Hook	HF-13	½-⅝ Wire	11	3
6	Swivel Eye	HF-14	½-⅝ Wire	11	3


RIGGERS BLOCK

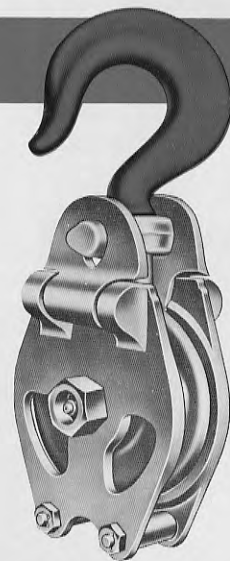

- Forged Hooks, Shackles, Heads, and Sheaves.
- Sealed Double Row Timken Bearings, Alemite lubrication.
- Lightweight, compact, easily handled, with convenient drop link opening feature.




Block Number	Sheave Size Inches	Capacity Tons	Wire Rope Size Inches	Weight Pounds Each
536 Hook	5	4	½	16
536A Shackle	5	4	½	16

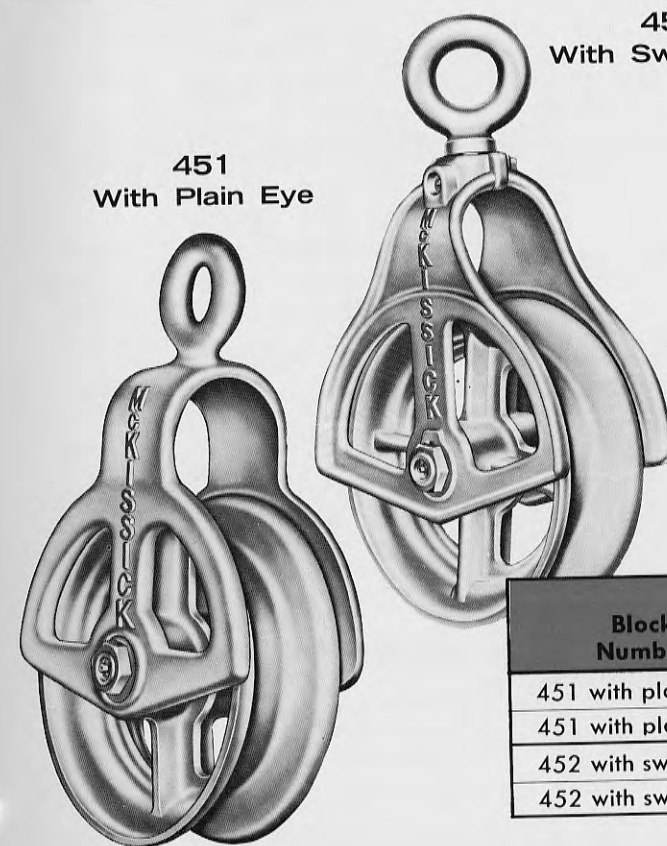451
With Plain Eye452
With Swivel Eye

- Alloy steel sheave, with flame hardened groove, for maximum wear under abrasive conditions.
- Double row "Timken" roller bearings, permanently sealed with Johns-Manville "Kipper" seals.
- Alemite lubrication throughout.
- All steel construction, heavy hot dip galvanized.

Block Number	Sheave Size Inches	Center Pin Diameter Inches	Weight Pounds Each	Safe Working Load, Tons
451 with plain eye	12	1¾	50	10
451 with plain eye	8	1¾	36	10
452 with swivel eye	12	1¾	50	10
452 with swivel eye	8	1¾	36	10

TRY-NET BLOCK

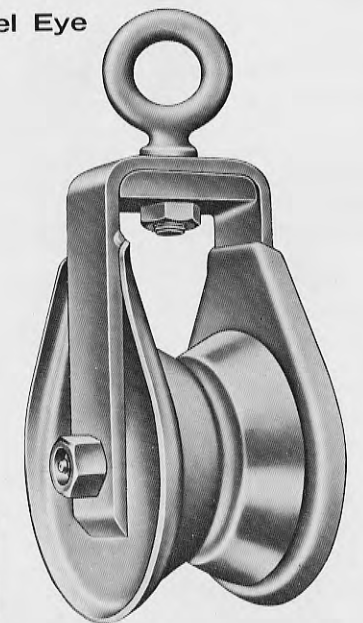454
With Swivel Eye

- Flame hardened sheave.
- Pressed steel side plates with flared edges.
- Forged steel swivel eye.
- Oilite bronze bushed, Alemite lubrication.
- Hot dip galvanized.

Block Number	Sheave Size Inches	Center Pin Diameter Inches	Weight Pounds Each	Safe Working Load, Tons
454	6	1¼	19	3

ALPHABETICAL INDEX

A	
Anchor Shackles	8, 9
B	
Barrel Hooks	15
Binders, Load	26, 27
Blocks —	
Construction	50 thru 58
Crane	30 thru 35
Custom Design	40 thru 43
Double Rig Trawl	73
Hay Fork	72
Hook	30 thru 35
Logging	72
Pipeline	70, 71
Riggers	72
Snatch	60 thru 69
Toggle	
(tail board)	60, 62, 64, 66, 67
Trawling	73
Try-Net	73
Bolts —	
Body	25
Elevator Socket	22
Eye	24, 25
Ring	25
Swing	22
Boom Pendant Clevis	22
C	
Chain Links	5, 6, 7
Chain Shackles	8, 9
Chain Swivels	7
Choker Hooks	15
Clevis, Boom Pendant	22
Clevis Grab Hook	14
Clevis Slip Hook	14
Clips —	
Bronze	4
Crosby	3
Fist Grip	4
Safety	4
Closed Wire Rope Sockets	20, 21
Combination — Barrel Hooks	15
Connecting Links	5
Construction Blocks	50 thru 58
Crane Blocks	30 thru 35
Crosby Wire Rope Clips	3
Crosby Wire Rope Blocks	58
D	
Dimensions and Data —	
Hooks	10 thru 15
Turnbuckles	16, 17, 18
Double Clevis Links	7
Double Rig Trawl Block	73
Drum Hooks	15
E	
Elevator Socket Bolts	22
End Links	6
Eye Bolts —	
Nut	24

Rivet	25
Screw	24
Eye Hooks	10
Eye Nuts	23
Eye Reversed, Hooks	23
Eyes —	
Lifting	23
Pad for Welding	23
F	
Fist Grip Wire Rope Clips	4
G	
Grab Hooks	14, 28
H	
Hay Fork Pulley	72
Hoist Hooks	10, 11, 12
Hook Dimensions	10 thru 15
Hooks —	
Barrel	15
Choker	15
Clevis Grab	14
Clevis Slip	14
Combination Barrel	15
Drum	15
Eye Grab	14
Eye Slip	14
Hoist	10, 11, 12
Pedro or Sling	14
Replacement Safety	12, 13
Reversed Eye	10
Safety Snap	13
Shank	11
Sliding Choker	15
Sling	10, 12, 14
Slip	14
Snap	13
Sorting	13
Swivel	12, 13
Wire Sling	10, 12, 13
J	
Jaw End-Swivels	7
Jaw End Turnbuckles	16, 18
K	
Keystone Links	5
L	
Lifting Eyes	23
Links —	
Alloy Master	6
Chain	5, 6
Double Clevis	7
End	6
Figure Eight	5
Keystone	5
Missing	5
Sling, Pear-shape	6
Swing	5
Load Binders	26, 27
Logging and Loading Block	72

M	
Missing Links (Genuine)	5
N	
Nuts —	
Crosby Clip	3
Eye	23
O	
Open Wire Rope Sockets	20, 21
Open Thimbles	19
Open Turnbuckles	16, 17
Overhaul Balls	36 thru 39
P	
Pad Eyes	23
Pear-Shape Missing Links	5
Pedro Hooks	14
Pipeline Blocks	70, 71
Plow Steel Thimbles	19
Pull Back Spring	28
Pulley, Hayfork	72
R	
Replacement Links	5
Replacement Safety Hooks	13
Reversed Eye Hooks	10
Riggers Block	73
Rigging Data	33
Ring Bolts —	
Nut	25
Screw	25
Rings, Weldless	6
Rivet Eye Bolts	25
Rod Ends	22
S	
Safety Hooks —	
Eye	10
Replacement	13
Shank	11
Snap	13
Swivel	12
Safety Latch Assembly	12
Safety Shackles	9
Shackles	8, 9
Shank Hooks	11
Sheaves	45 thru 49
Shrimp Blocks	73
Sliding Choker Hooks	15
Sling Hooks	10, 13, 14
Sling Links	6
Slip Hooks	14
Snap Hooks	13
Snatch Blocks	60 thru 69
Socket Bolts, Elevator	22
Sockets —	
Spelter (open and closed)	21
Swage (open and closed)	20
Wedge	22
Sorting Hooks	13
Spring, Pull Back	28
Stainless Steel Thimbles	19
Straight Hole Eye Bolt	22
Stub End Turnbuckles	17

Swage Sockets	20
Swing Bolts	22
Swing Links	6
Swivel Hooks	12, 13
Swivels	7
T	
Tail Board Blocks	
(Toggle)	60, 62, 64, 66, 67

Tail Chains	28
Thimbles	19
Toggle Blocks	
(Tail Board)	60, 62, 64, 66, 67
Trawling Block	73
Trawling Shackles	9
Try-Net Block	73
Turnbuckles	16 thru 18

U	
U-Bolt Wire Rope Clips —	
Crosby	3
W	
Wedge Sockets	22
Welding Eyes	23
Wire Rope Sheaves	45 thru 49

NUMERICAL INDEX


FITTINGS:

ITEM NUMBER	PAGE	ITEM NUMBER	PAGE
130	27	335	5
140	27	338	5
150	26	340	6
180	28	341	6
185	28	342	6
190	28	350	15
195	28	373	15
197	28	376	15
209	8	377	15
210	9	378	13
213	8	400	23
215	9	401	7
223	16	402	7
225	16	403	7
226	16	405	23
227	16	408	19
228	16	410	19
247	7	411	19
251	17	412	19
256	25	414	19
257	25	416	21
260	25	417	21
261	25	419	22
264	23	420	22
268	25	421	22
274	25	429	4
275	24	446	3
276	25	448	3
277	24	449	3
288	24	450	3
291	24	501	20
293	25	502	20
295	22	643	6
319	11	2130	9
320	10	2131	9
321	10	2150	9
322	12	2510	17
323	14	3311	14
324	14	3315	13
330	14	3316	13
331	14	4028	23
334	5	4055	12

BLOCKS:

ITEM NUMBER	PAGE	ITEM NUMBER	PAGE
160	61	510	51
170	61	511	51
300	34	512	51
301	34	513	51
302	34	536	72
303	34	600	52, 53
310	35	601	52, 53
311	35	602	52, 53
312	35	603	52, 53
313	35	604	52, 53
330	30, 31	605	52, 53
331	30, 31	606	52, 53
332	30, 31	607	52, 53
333	30, 31	608	52, 53
334	30, 31	610	56
335	30, 31	611	56
340	32, 33	612	56
341	32, 33	613	56
342	32, 33	614	56
343	32, 33	C-700	60
344	32, 33	M-700	54, 55
350	30, 31	701	54, 55
351	30, 31	702	54, 55
352	30, 31	703	54, 55
353	30, 31	704	54, 55
354	30, 31	705	54, 55
355	30, 31	706	54, 55
404	64	707	54, 55
405	67	708	54, 55
406	66	C-710	58
407	62	M-710	57
408	63	711	57
409	63	712	57
410	67	713	57
411	67	714	57
416	65	C-720	60
417	65	800	50
418	64	801	50
419	64	802	50
420	66	803	50
421	66	810	51
430	62	811	51
431	62	812	51
432	63	813	51
433	63	50000 Series	36, 37
439	68	60000 Series	38, 39
440	68	HF-1 thru 14	72
441	68	LL-1	72
451	73	HPH-1 & 2	71
452	73	HPL-1 & 2	71
454	73	PB-1, 2, 3 & 4	69
500	50	PH-1 & 2	70
501	50	PL-1 & 2	70
502	50	PR-1, 2, 3 & 4	69
503	50		

Look for this emblem...

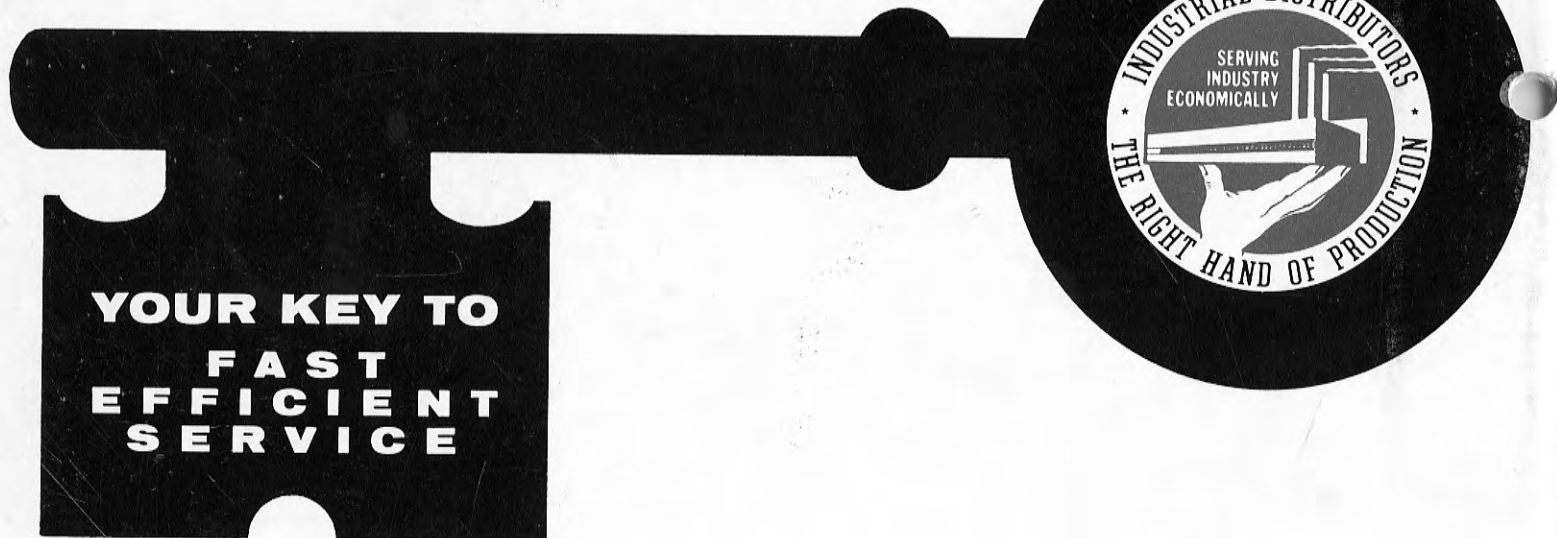

CHECK WITH YOUR INDUSTRIAL DISTRIBUTOR

See your AUTHORIZED Crosby-Laughlin DISTRIBUTOR, he is one of your MOST important assets. He stocks thousands of quality items for fast — efficient service for you. In every major trading area he is as close as your phone.



CENTRALIZED FACTORY WAREHOUSING

CROSBY-LAUGHLIN gives fast service from a highly efficient centralized warehouse and factory in Fort Wayne, Indiana. Other factory stocking warehouses in key trading areas in the United States and Canada further speed this distribution program.

DISTRIBUTED BY

CROSBY-LAUGHLIN
FORT WAYNE, INDIANA 46801

Division of
**AMERICAN
HOIST**