


THIS CHART IS DESIGNED SPECIFICALLY FOR CONTACT OR VISUAL PILOTAGE AND IS NOT INTENDED FOR GENERAL NAVIGATION

RELIEF PORTRAYAL

Elevations are in feet. HIGHEST TERRAIN elevation is **1,329** feet located at 9°48'N, 104°38'E

TERRAIN CHARACTERISTIC TINTS


(areas of unreliable relief are devoid of tint)

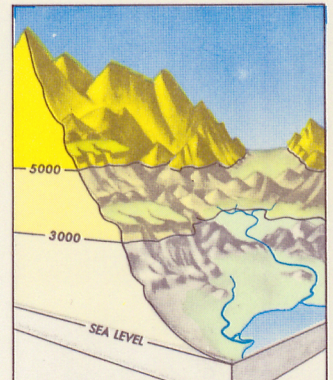

GREEN color indicates flat or relatively level terrain regardless of altitude above sea level.


RELIEF SHOWN BY FORM LINES

BASE LEGEND

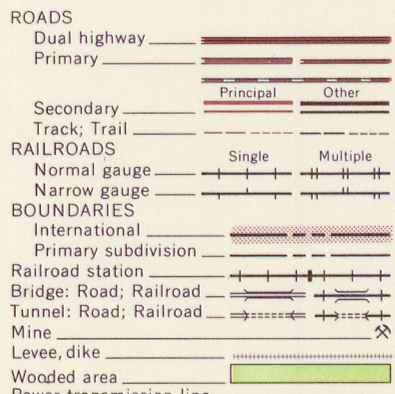

CAUTION: Power line information has been extracted from the most reliable source available. However, there is no assurance that all power lines are shown.

AERONAUTICAL INFORMATION

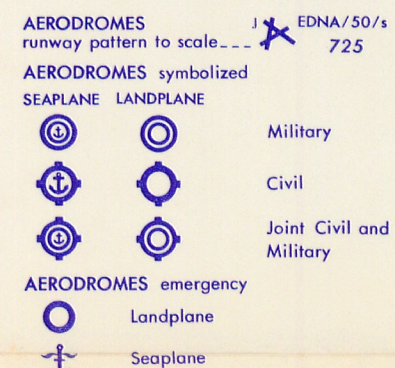

50 - Length of longest runway to nearest hundreds of feet.

• - Soft or unimproved surface. Absence of "s" indicates hard surface runways or surface information unavailable.

725 - Elevation

• - Jet facilities

Obstruction

Numerals in italics indicate elevation above sea level of obstruction top. Vertical numerals within parentheses indicate height above ground. Obstructions are labeled, indicating nature of obstruction, i.e., building, smokestack, etc. (Towers are not labeled)

Group obstruction

Radio facility obstruction

Isogonic line

Ocean station vessel (Normal position)

Visual ground sign


RELIABILITY OF VERTICAL OBSTRUCTION DATA

No obstructions 200 feet or more above ground level are known to exist.


CAUTION

AIR INFORMATION CURRENT THROUGH 19 JULY 1962

Aeronautical information shown in this color is subject to frequent changes. The rate of change of air information precludes revision of this chart to insure currency. Consult NOTAMS, USAF/USN Flight Bulletins or US Army TM 11 series for the latest complete information.

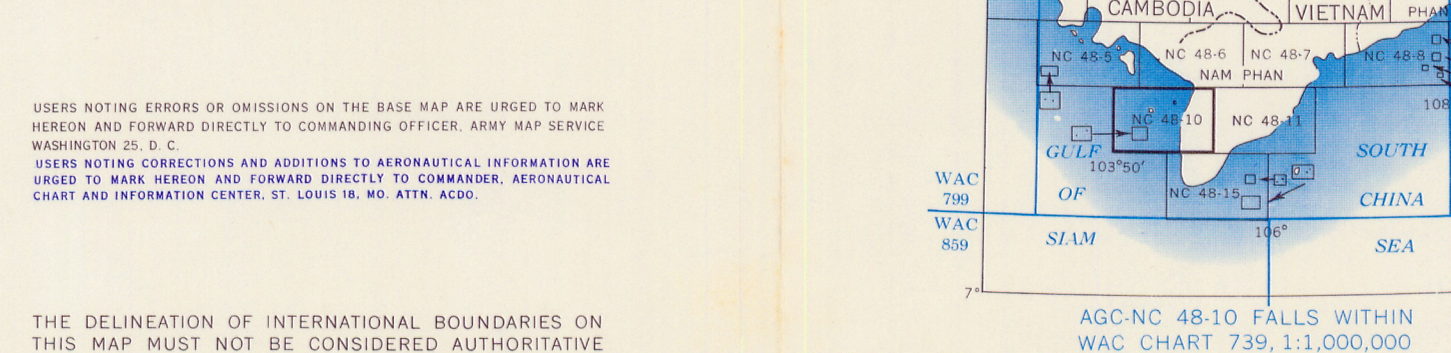

AERONAUTICAL CHART

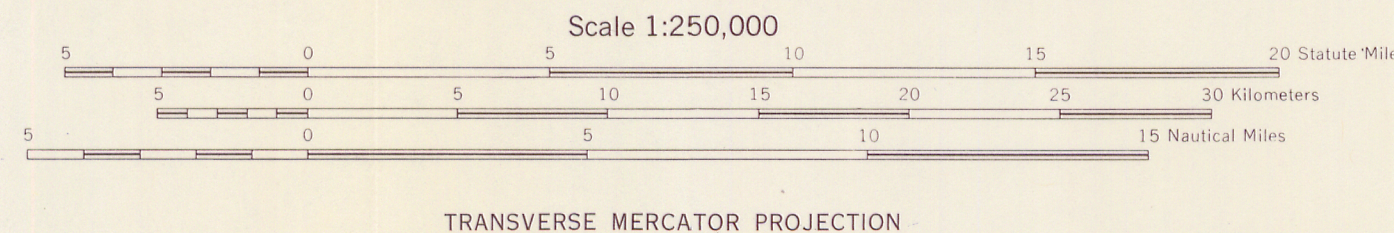

THE DELINEATION OF INTERNATIONAL BOUNDARIES ON THIS MAP MUST NOT BE CONSIDERED AUTHORITATIVE

BLUE NUMBERED LINES INDICATE THE 10,000 METER UNIVERSAL TRANSVERSE MERCATOR GRID, ZONE 48, EVEREST SPHEROID

THE LAST FOUR DIGITS OF THE GRID NUMBERS ARE OMITTED

ELEVATIONS IN FEET

GRID ZONE DESIGNATION: 48P				TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 100 METERS			
100,000 M. SQUARE IDENTIFICATION				SAMPLE POINT: X. BA VINH			
US	VS	WS	WR	US	VS	WS	WR
UR	VR	WR	WR	UR	VR	WR	WR
UQ	VQ	WQ	WQ	UQ	VQ	WQ	WQ
IGNORE THE SMALLER figures of any grid number; there are no finding the full coordinates, use ONLY the LARGER figures in the top or bottom margin, or on the two sides.				Estimate height from grid line to point: 1. Read letters identifying 100,000 meter square in which the point lies. 2. Locate first VERTICAL grid line to LEFT of point and read LARGE figure labeling the line either in the top or bottom margin, or on the two sides. 3. Locate first HORIZONTAL grid line BELOW point and read LARGE figure labeling the line either in the left or right margin, or on the two sides. 4. Estimate height from grid line to point.			
SAMPLE REFERENCE: 48PWR2511				If reporting beyond 25' in any direction, prefix Grid Zone Designation, as: 48PWR2511			